
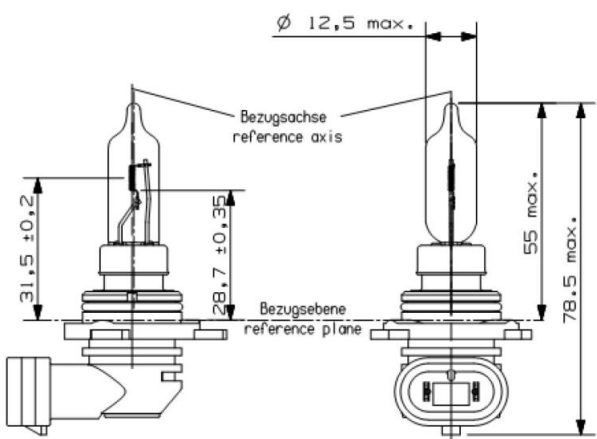


#### GENERAL

	HIR2 +30 12V 55W PX22d 9012 +30 12,8V 60W PX22d +30 More Light	<b>Features</b>	original equipment manufacturer quality, high luminance, Infrared coating, yellow cover plate, hardglass, UV-cut
	<b>Ordering Number</b> 28432	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam, Bi-halogen function

#### TECHNICAL DETAILS

	<b>Rated Voltage</b>	ECE R37: 12V DOT: 12,8V	
	<b>Rated Wattage</b>	max. 63W @ 13,2V max. 60W @ 12,8V	
<b>Base</b>	PX22d	<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament
<b>Geometry</b>	Light center length: 28,7mm ± 0,35mm (ECE), 31,5mm ± 0,2mm (DOT) Bulb diameter: max. 12,5mm	<b>Luminous Flux</b>	1875 lm ± 15% @ 13,2V 1700 lm ± 15% @ 12,8V
<b>Lifetime</b>	B3: 300h @ 13,2V B3: 150h @ 14,0V B10: 360h @ 13,2V B10: 180h @ 14,0V Tc: 500h @ 13,2V Tc: 250h @ 14,0V		

#### DELIVERY DETAILS

<b>Packaging</b>	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 07.12.2017

replace for 12.04.2017

file 28432 - HIR2 +30 12V 55W PX22d.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.