


Product Information Sheet HB3 BLUE 12V

GENERAL				
	HB3 BLUE 12V 60W P20d 9005 BLUE 12,8V 65W P20d Blue Version	Features	original equipment manufacturer quality, bright white light, blue coating, color temperature up to 4000K, hardglass, UV-cut	
	Ordering Number 28616	Standard	ECE R37 DOT	
Product Description	halogen headlighting lamp	Typical Applications	high beam	

TECHNICAL DETAILS

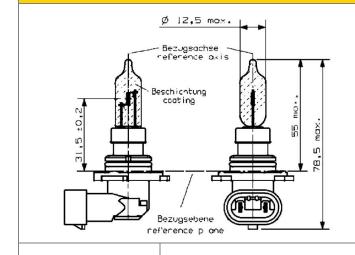

Geometry

Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm

Rated Voltage	ECE R37: 12V DOT: 12,8V	
Rated Wattage	max. 73W @13,2V max. 70W @12,8V	
Base	P20d	
Operating Conditions	burning position: horizontal, long electrode above filament	
Luminous Flux	1860 lm ± 12% @13,2V 1700 lm ± 12% @12,8V	
Lifetime	B3: 150h @14,0V B50: 300h @14,0V Tc: 330h @14,0V	

DELIVERY DETAILS

Packaging

Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1) Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

 valid from
 12/04/2017
 replace for
 26.01.2015-V2-PN15/0043
 file
 28616 - HB3 BLUE 12V 60W P20d.100