
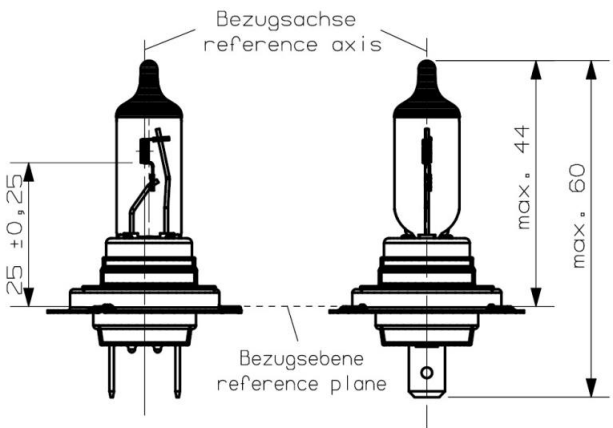


| GENERAL | | | |
|---|--|-----------------------------|---|
|  | H7 SHP LLT 24V 70W PX26d Shock Proof, Long Lifetime | Features | original equipment manufacturer quality, black top color, hardglass, UV-cut, support wire |
| | Ordering Number 28729 | Standard | ECE R37 |
| Product Description | halogen headlighting lamp with double coil | Typical Applications | low beam, high beam, fog light |

| TECHNICAL DETAILS | | | |
|---|--|-----------------------------|---|
|  | | Rated Voltage | ECE R37: 24V |
| | | Rated Wattage | max. 75W @28V |
| | | Base | PX26d |
| | | Operating Conditions | burning position: horizontal, long electrode above filament |
| | | Luminous Flux | 1750 lm ± 10% @28V |
| Geometry | Light center length: 25mm ± 0,25mm Bulb diameter: max. 12,5mm | Lifetime | B3: 500h @28V Tc: 1000h @28V |

| DELIVERY DETAILS | | |
|------------------|---|---|
| Packaging | Industrial Packaging: 180pcs. (4×45) Commercial Box Packaging: 100pcs. (10×10×1) | Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. |

valid from 12/04/2017

replace for 29.11.2014-V4-PN14/0054

file 28729 - H7 SHP LLT 24V 70W PX26d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com