



Characteristics

Direct replacement for luminaires with fluorescent lamps
 Suitable for recessed ceiling systems with a grid size of 600 x 600 mm
 Suitable for suspended and recessed mounting
 Flicker free
 Easy and quick installation
 Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
 Luminous efficiency of >100 lm/W
 Material of the body: Aluminium
 Material of the LGP: PMMA
 RFI conform up to 300MHz
 Immunity according to standard
 PF> 0.9

Typical application

Office lighting
 Schools
 Commercial areas
 Workshops

Technical parameters

Input

Rated power
 Main voltage
 Power Factor (230VAC/50Hz)
 Mains frequency
 Dimmability
 Energy efficiency class

40W
 200-240VAC
 0.95
 50/60Hz
 No
 LED

Body

Material of the body
 Material of the LGP
 Length
 Width
 Height
 Color of the body

Aluminium
 PMMA
 595 mm
 595 mm
 10 mm
 Grey / White

Lighting characteristics

Luminous flux
 Efficiency
 Color rendering index (CRI)
 Color temperature (CCT)
 Flicker
 UGR
 McAdam Index

4 000 lm
 100 lm/W
 >80
 3000K/4000K/6500K
 Flicker free
 <19
 <6

Lifespan and Warranty

Lifespan
 Warranty

50 000 h
 5Y

Environment

Operating temperature range
 Storage temperature range
 EMC
 Safety
 Immunity

-10 ~ 40°C
 -20 ~ 60°C

EN 55015
 EN 61347-2-13
 EN 61547

Protection


Ingress protection IP
 Safety class

IP40
 Class II


Approvals

CE

Lighting Curves

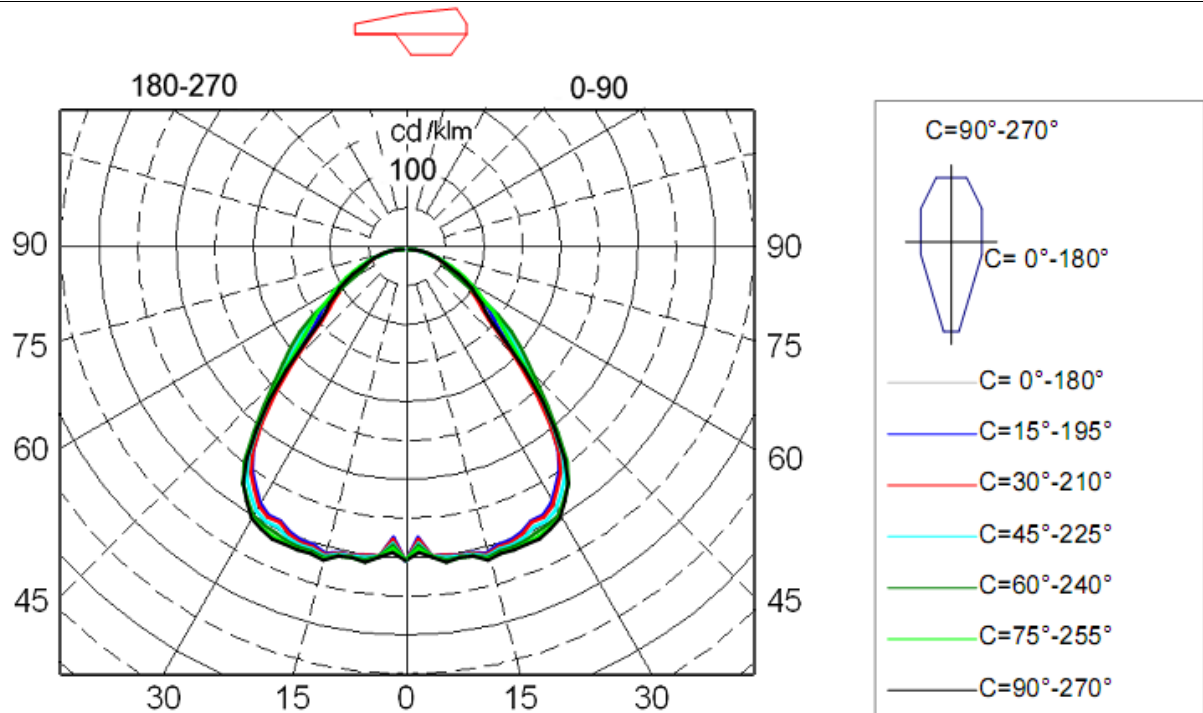


Lighting Curves 3D

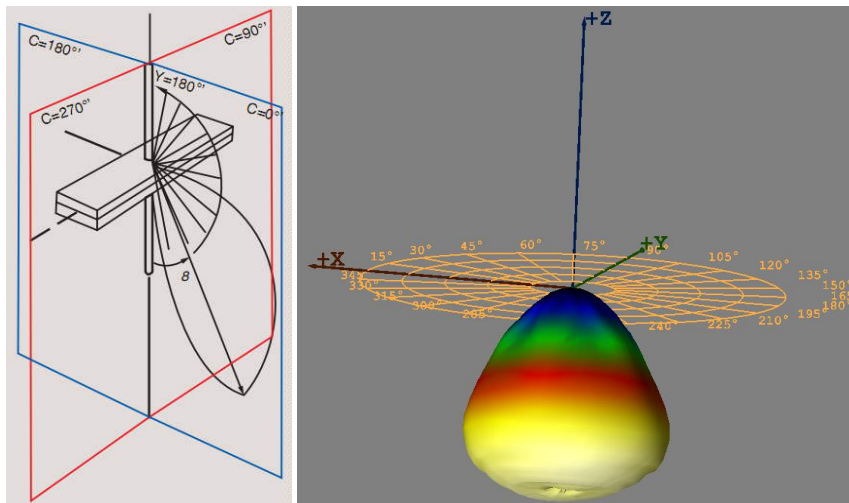


Packaging Information

Each Panel is placed in a Single Carton Box with dimensions 625mm x 35mm x 660mm.
5 x Single Box LED Edge are place in one Industrial Package with dimensions 632mm x 198mm x 675mm.
Industrial Package is placed on a Pallet depending on the dimensions and requirements.


Energy Efficiency Class:

**Electrostart**
STARTS UP THE LIGHT

9811 LED EDGE



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012

